


## TECHNICAL DATA: SUPERVAC VACUUM VALVES

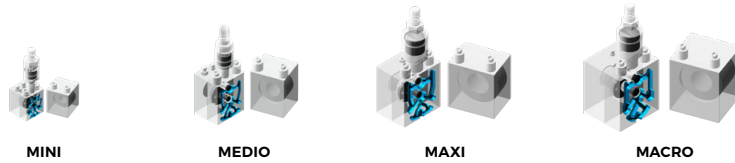

	SUPERVAC MINI		SUPERVAC MEDIO		SUPERVAC MAXI		SUPERVAC MACRO	
Die casting machine tonnage (t)	< 400 approx.		200 – 1200		800 – 2800		1600 – 4500	
<b>CHARACTERISTICS</b>								
Closing system	Closed by the kinetic energy of the metal		Closed by the kinetic energy of the metal		Closed by the kinetic energy of the metal		Closed by the kinetic energy of the metal	
Closing time (ms)	1		1		1		1	
<b>SCOPE</b>								
Al / Mg	■		■		■		■	
Zn	■		■		-		-	
Shot weight Al (kg)	0,3 – 1,5		1 – 12		6 – 25		12 – 45	
Shot weight Mg (kg)	0,07 – 1		0,7 – 8		4 – 16		8 – 30	
Shot weight Zn (kg)	0,2 – 4		3 – 20		-		-	
<b>TECHNICAL DATA</b>								
	Valve	Compensator	Valve	Compensator	Valve	Compensator	Valve	Compensator
Width (mm)	63	63	100	100	140	140	150	150
Depth (mm)	63,4	63,5	88,9	88,9	108	108	139,7	139,7
Height (mm)	76	75	127	126	152	151	171	170
Weight (kg)	3	2,3	9,6	8,4	19	16,4	28,4	25,4

Patented worldwide